BRUHAT BANGALORE MAHANAGARA PALIKE

DASARAHALLI ZONE

Name of Work: Improvements of CC road from Excel Kalyana Mantapa road, Bharathi theater road Lakshmaiah building road & Amogha hotel side road link to NH 4 road in Dasarahalli Ward No 15

Sl	Description of Item	Unit	Est. Cost Rs				15.00	Lakhs	
			No	L	B	D	Qty	Rate	Amount
1	KSRRB M200-Dismtling of existing structures like culverts, Bridges, retaining walls and other structure comprising of masonary, cement concrete, wood work,steel work, including T&P and scaffolding whereever necessary, sorting the dismanlet material, disposal of unserviceable material and stacking the serviceable material with all lifts complete as per specification Lime/Cement concrete I. By Manual Means C. Prestressed /Reinforced cement concrete Grade M-20 & above (P-139, It 18.19) PWD SR 2018-19								
		Cum	1	115.00	4.60	0.30	158.70		
							158.70	1684.34	267305.00
	Basic Rate	1589.00							
	Add Area Weightage	95.34							
	Total	1684.34							
2	KSRRB 300 - Excavation for road, drains and similar works - KSRRB 300-1. Earthwork excavation by manual means in Ordinary soil involving an average horizontal throw upto 2 meters and an average lift upto 0.5 m, excavated surface leveled and sides neatly dressed, the disposed earth to be leveled neatly after breaking of clods complete as per specifications complete as per specifications. MORTH Chapter 3 (P.143/I.19.1 PW, P & IWTD - SR 2018-19)								
			1	115.00	4.60	0.15	79.35		
							79.35	137.80	10934.00
	Basic Rate	130.00							
	Add Area Weightage 6%	7.80							
	Total	137.80							
3	Providing, laying, spreading and compacting graded stone aggregates to wet mix macadam specifications including pre mixing the material with water at OMC in mechanical mix plant carriage of mixed method of tipper to site, laying in uniform layers with paver in sub-base / base course on well prepared surface and compacting with vibratory roller to achieve the desired density complete as per specifications. Specification No. 406 with all leads and lifts etc., complete as per the direction of Engineer-in-charge of the work.(PWD SR 2018-19, P.No.155, I No.20.18)								
		Cum	1	115.00	4.60	0.23	121.67		
							121.67	2001.28	243496.00
	Basic Rate	1888.00							

Scanned with CamScanner

	Add Area Weightage 6%	113.28							
	Total	2001.28							
4	KSRRB M2100·10. Providing and laying Plain cement concrete of mix 1:3:6 with OPC @ 220kgs, with crushed 40mm and down size graded granite metal coarse aggregates @0.89cum and fine aggregates @ 0.46cum, in foundation mechanically mixed, placed in foundation and compacted by vibration including curing for 14 days including cost of all materials, labour, HOM curing, form works, scaffolding and centering complete as per specifications. MORTH Specification No. 2100 (P.222/I.27.18) PWD · SR 2018·19)								
		Cum	1	115.00	4.60	0.10	52.90		
	Basic Rate	5115.00					52.90	5421.90	286819.00
	Add Area Weightage 6%	306.90							
	Total	5421.90							
5	Cement concrete pavement.Construction of un-reinforced plain cement concrete pavement, thickness as per design, over a prepared sub base with OPC cement or any other type as per clause 1051.2.2 with 25mm and down size graded granite metal coarse aggregates and fine aggregtes , with superplastisiser @3lts confirming to IS9103·1999 Reaffirmecf'2008 , mixed in a concrete mixer of not less than 0.6 cum capacity and appropriate weigh batcher as per approved mix design, laid in approved fixed side form work (steel channel, laying and fixing of 125 micron thick polythene film, wedges, steel plates including levelling the form work as per drawing). Spreading the concrete with shovels, rackers compacted using needle, screed and plate vibrator and finished in a continuous operation including provision of contraction, expansion, construction and longitudinal joints, joint filler, separation membrane, selant primer, joint sealant, admixtures as approved, curing compound, finishing to lines and grades as per drawing complete as per specifications. M30 (at 360kg per cum coarse aggregate @ 0.69cum and fine aggregate @ 0.43cum) ((P.No.176, I.No.22.6.1 of PW,P&IWTD SR 2018·19)								
		Cum	1	115.00	4.60	0.15	79.35		
	Basic Rate	4916.00					79.35	5210.96	413490.00
	Add Area Weightage 6%	294.96							
	Total	5210.96							
6	Vaccum de·watering with vaccum pump and suction mat and compaction with skin floater clubbed with floating disc including cost of generator, HOM of machinery,screed vibratory,power Floater,blade and disc etc., with all lead and lift [P.No.176 · I.No.22.7]PWD · SR 2018·19)								
		Sqm	1	115.00	4.60		529.00		
	Basic Rate	68.00					529.00	72.08	38130.00
	Add Area Weightage 6%	4.08							
	Total	72.08							

Scanned with CamScanner

7	Disposal of debris to the final place of disposal with all lead and lift and as direction by the engineer in charge of the work, lead 4 Km a) Basic rate for haulage of materials as per item No. 17.4/KSRRB : M100-4.1 ..... Rs. 2.00 Tonne/Km b) Average earth of work 1.28 Tonne/Km for Rs. 2.00/Km c) Add loading and unloading Page No. 136 Item No. 17.1 PWD SR 2018-19								
		Cum	Qty Vide Item No. 2				145.00	69.80	10121.00
	Loading and Unloading Charges	57.00							
	Lead 4 KMs 2x1.28x4	12.80							
		69.80							
							Sub Total		1270295
8	Tender Premium Charge 5%								63515.00
9	PMC Charge 1%								12703.00
10	GST Charge 12%								152435.00
11	Miscellaneous and UnforessenCharges								1052.00
								Total	1500000.00
	Rupees Fifteen Lakhs Only								

CERTIFICATE:-

1 The Work spot has been inspected and the work is found to be necessary

2 The Estimate is prepared as per the PW,P & IWTD -SR-2018-19

3 The Provision made in estimate are adequate and essential.

4 This area comes under BBMP limits.

Assistant Engineer
Ward No 15

Assistant Executive Engineer
T. Dasarahalli Sub-Division
B.B.M.P

Executive Engineer
Dasarahalli Division
B.B.M.P. Bangalore.

ಸಂ. EE/DD/AS/129/19-20 ದಿನಾಂಕ :

ರೂ. Rs 15 00 lakh
Rupee Fifteen lakh only

ಅಂದಾಜು ಪಟ್ಟಿಗೆ ಆಡಳಿತಾತ್ಮಕ ಮಂಜೂರಾತಿ ನೀಡಿದೆ

ಕಾರ್ಯಪಾಲಕ ಅಭಿಯಂತರರು
ಬಿ.ಬಿ.ಎಂ.ಪಿ.ದಾಸರಹಳ್ಳಿ ವಿಭಾಗ
ದಾಸರಹಳ್ಳಿ ವಲಯ, ಬೆಂಗಳೂರು.

ಸಂ. EE/DD/TS/54/18-19 ದಿನಾಂಕ : 30/01/2019

ರೂ. 15.00 lakhs/- (Rs Fifteen lakhs only)

ಗಳ ಅಂದಾಜು ಪಟ್ಟಿಗೆ ತಾಂತ್ರಿಕ ಮಂಜೂರಾತಿ ನೀಡಿದೆ

ಕಾರ್ಯಪಾಲಕ ಅಭಿಯಂತರರು
ಬಿ.ಬಿ.ಎಂ.ಪಿ.ದಾಸರಹಳ್ಳಿ ವಿಭಾಗ
ದಾಸರಹಳ್ಳಿ ವಲಯ, ಬೆಂಗಳೂರು

Scanned with CamScanner

Cross Section of Pavement Road

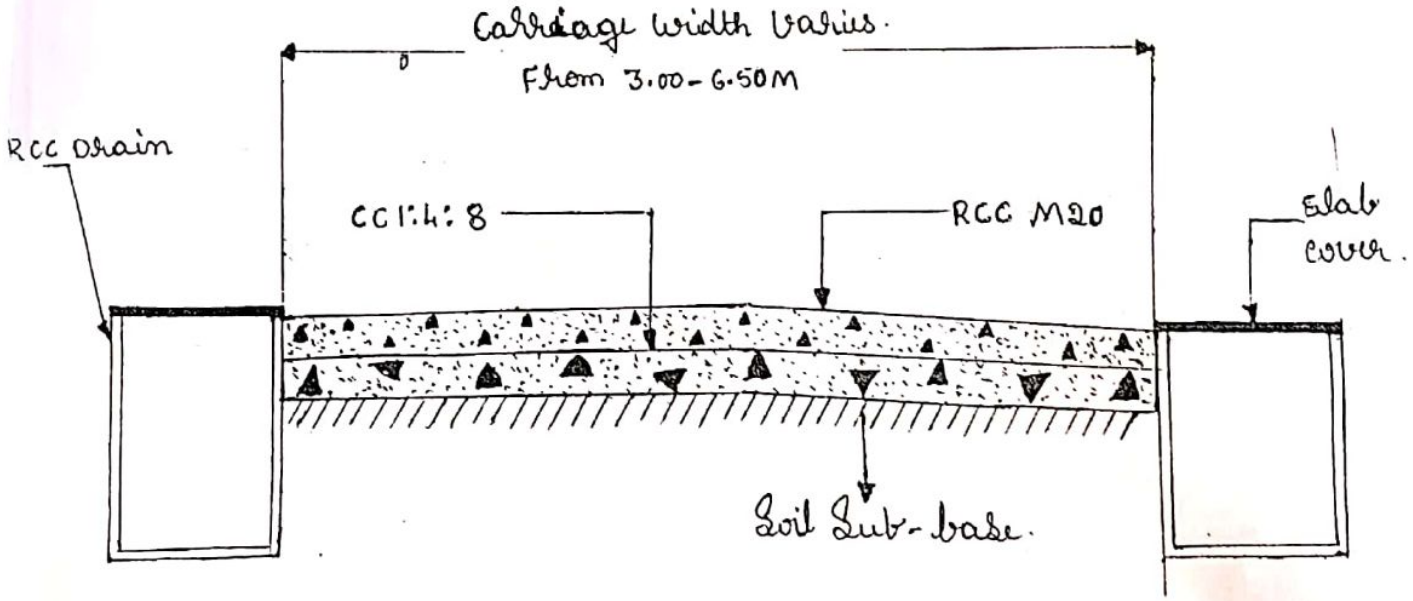

ಸಹಾಯಕ ಕಾರ್ಯಪಾಲಕ ಅಭಿಯಂತರರು
ಟಿ.ದಾಸರಹಳ್ಳಿ ಉಪ-ವಿಭಾಗ
ಬಾಗಲಗುಂಟೆ, ಬಿಬಿಎಂಪಿ
ಬೆಂಗಳೂರು

Scanned with CamScanner

Scanned with CamScanner

Scanned with CamScanner